

general compliance with our design and permit drawings. The contractor is responsible for confirming and correlation all quantities and dimensions; selecting fabrication process and techniques of construction; coordinating his work with that of all other trades and performing his work in a safe and satisfactory manner.

**Designer's Signature:** 2018-01-22 Date :


B2

8-00-00

1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP

2

8



## FROM PLAN DATED: SEPT 2017 **BUILDER: AGRIGENTO HOMES**

SITE: TOWNS

MODEL: BLOCK B

**ELEVATION:** 

LOT: 111 WILSON ST E

CITY: ANCASTER

SALESMAN: D M DESIGNER: CZ **REVISION:** 

DEAD LOAD: 15.0 fb/ft

TILED AREAS: 20 lb/ft

2nd FLOOR


DATE: 02/01/2018

NOTES:

10-00

**REFER TO THE NORDIC INSTALLATION GUIDE FOR PROPER** STORAGE AND INSTALLATION. SQUASH BLOCKS OF 2x4, 2x6, 2x8 #2 S.P.F REQ'D UNDER INTERIOR UNIFORM LOAD BEARING WALLS. MULTIPLE SQUASH BLOCKS REQ'D UNDER CONCENTRATED LOADS, SEE FIGURE 1. CANTILEVERED JOISTS INCLUDING CANT' OVER BRICK REQ. I-JOIST BLOCKING ALONG BEARING AND RIMBOARD CLOSURE AT ENDS. SEE FIGURES 4 & 5 FOR **REINFORCEMENT REQUIREMENTS.** FOR HOLES INCLUDING DUCT CHASE AND FIELD CUT OPENINGS SEE FIGURE 7, TABLES 1 & 2. CERAMIC TILE APPLICATION AS PER O.B.C 9.30.6. LOADING: DESIGN LOADS: L/480.000 LIVE LOAD: 40.0 lb/ft<sup>2</sup>

SUBFLOOR: 3/4" GLUED AND NAILED

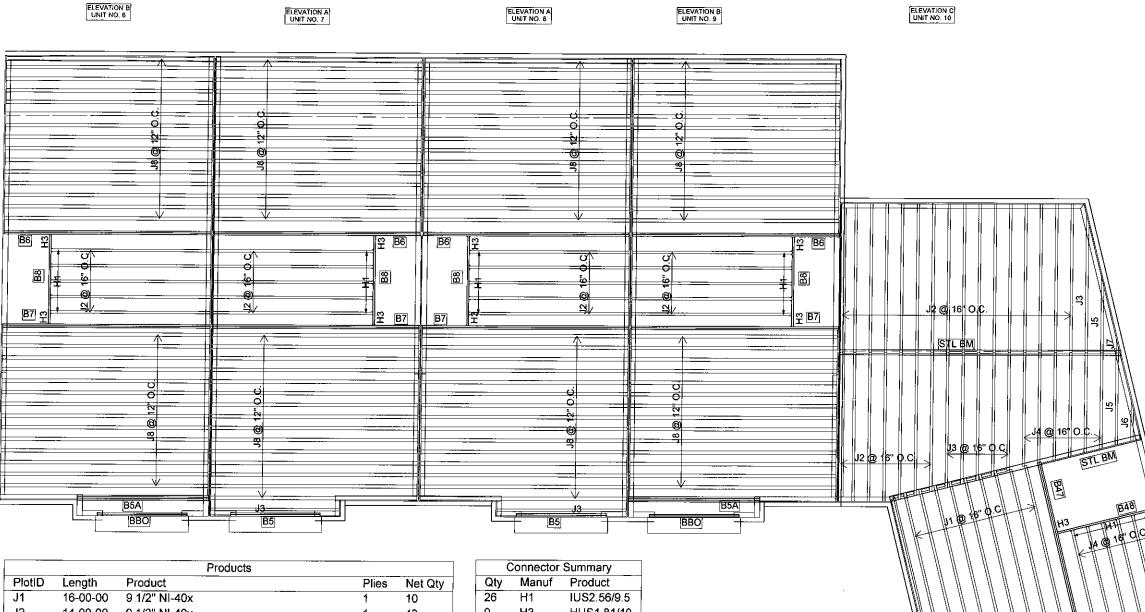

	FIOUD	Lengui	FIGUUGE	Flies	net Qty
	J1	16-00-00	9 1/2" NI-40x	1	10
	J2	14-00-00	9 1/2" NI-40x	1	43
	J3	12-00-00	9 1/2" NI-40x	1	8
	J4	10-00-00	9 1/2" NI-40x	1	13
	J5	8-00-00	9 1/2" NI-40x	1	20
j	J6	4-00-00	9 1/2" NI-40x	1	1
	J7	2-00-00	9 1/2" NI-40x	1	1
Ì	J8	18-00-00	9 1/2" NI-80	1	1 <b>18</b>
ĺ	B6	18-00 <b>-</b> 00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	8
	B7	18-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	8
	B47	16-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	2
	B5A	12-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	3	6
	B48	10-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
	B8	8-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	4
Į	B5	8-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	2	4

	Connector Summary				
Qty	Manuf	Product			
26	H1	IUS2.56/9.5			
9	H3	HUS1.81/10			

## SHOP DRAWING REVIEW

Virtual Creations Inc has reviewed these shop drawings. Correction or comments made on the shop drawings during this review does not relieve the contractor from compliance with requirements of the drawings and specifications. This check is only for review of general compliance with our design and permit drawings. The contractor is responsible for confirming and correlation all quantities and dimensions; selecting fabrication process and techniques of construction; coordinating his work with that of all other trades and performing his work in a safe and satisfactory manner. **Designer's Signature:** 2018-01-22 Date :



FROM PLAN DATED: SEPT 2017 **BUILDER: AGRIGENTO HOMES** 

SITE: TOWNS

MODEL: BLOCK B

**ELEVATION:** 

LOT: 111 WILSON ST E

**CITY: ANCASTER** 

SALESMAN: D M **DESIGNER: CZ REVISION:** 

## NOTES:

REFER TO THE NORDIC **INSTALLATION GUIDE FOR PROPER** STORAGE AND INSTALLATION. SQUASH BLOCKS OF 2x4, 2x6, 2x8 #2 S.P.F. REQ'D UNDER INTERIOR UNIFORM LOAD BEARING WALLS. MULTIPLE SQUASH BLOCKS REQ'D UNDER CONCENTRATED LOADS. SEE FIGURE 1. CANTILEVERED JOISTS INCLUDING CANT' OVER BRICK REQ. I-JOIST BLOCKING ALONG BEARING AND RIMBOARD CLOSURE AT ENDS. SEE FIGURE 7 TABLES 4 & 5 FOR **REINFORCEMENT REQUIREMENTS.** FOR HOLES INCLUDING DUCT CHASE AND FIELD CUT OPENINGS SEE FIGURE 7 TABLES 1 & 2 OF THE INSTALLATION GUIDE. CERAMIC TILE APPLICATION AS PER O.B.C. 9.30.6 LOADING: DESIGN LOADS: L/480.000 LIVE LOAD: 40.0 lb/ft<sup>2</sup>

DEAD LOAD: 15.0 b/ft TILED AREAS: 20 lb/ft

SUBFLOOR: 3/4" GLUED AND NAILED

DATE: 02/01/2018

**3rd FLOOR**